



Total Food-Service Solutions


## Modular Electric Wok Induction NEWI 4-60 AM, Electric Cooker with One Ceramic Glass

ITEM#

MODEL#

NAME#

S/N#

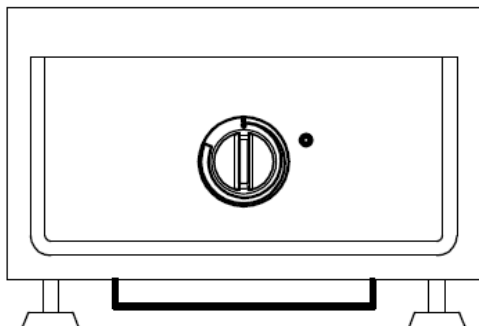

\*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

### Amicus Modular Electric Wok Induction

### Electric Cooker with One Ceramic Glass

NEWI 4-60 1AM      ONE CERAMIC GLASS,  
ONE CONTROL KNOB  
PAN DETECTION SYSTEM

### Short Form Specification

#### Item No.

Nayati Electric Wok Induction consists of 1 wok induction element of 3.5 kW power rate, This appliance provided by one ceramic glass on it and also equipped with electric control knob to adjust the cooking temperature. Unit to be installed on open cabinet or similar elements, cantilever, or solid block solutions. Featuring rear seamless fitting to Amicus family products.

### Main Features

- Efficient oriental cooking equipment.
- Induction glass is 6 mm with fast induction heating of 3.5 kW.
- Unit to be installed free standing, can be joined with base cabinet, table stand or cantilever system.
- Top panel and frontal body are unified but removable, so it is water protected and easy to service.
- Pan detection system, heating energy is emitted only when a pan is in contact with inductions Low operating temperature emitted.

### Construction

- All exterior panels in 304 type of Stainless Steel
- Orbital top panel anti-scratch finishing.
- Top and side are mounted by 1.2mm of Stainless Steel with pressed panel in side and front for solid construction.

### Included Accessories

- Clip plate for joining.

### Optional Accessories

- Power Cable.


APPROVAL:

PT. NAYATI INDONESIA  
Telephone +62 024 658 05 73  
Telefax +62 024 658 05 72  
nayati@nayati.com




Modular Electric Wok Induction  
NEWI 4-60 AM, Electric Cooker  
with One Ceramic Glass


Front

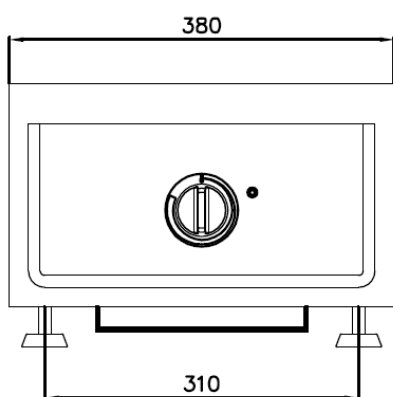

Top

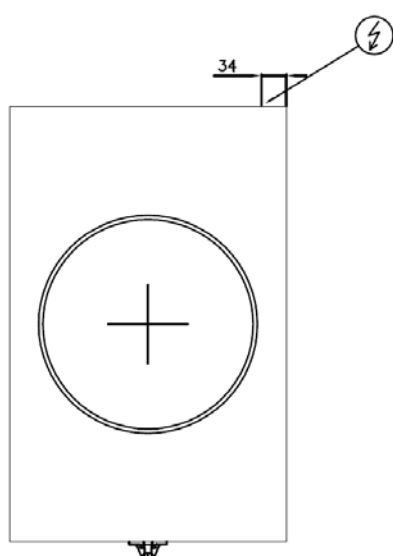

Side

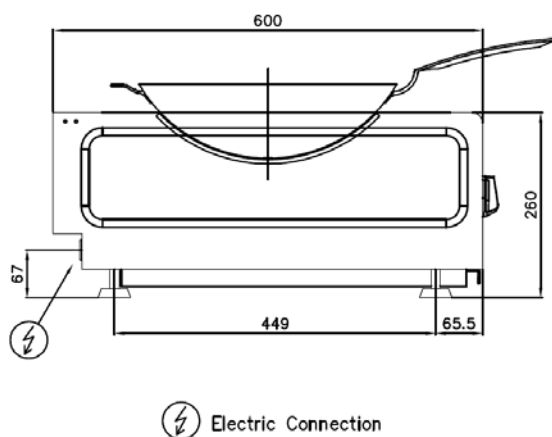

\* Overall Dimension in mm

### Electric

<b>Electrical rating (kW):</b>	3.5
<b>Element rating (kW):</b>	3.5
<b>Electrical supply voltage:</b>	230V 1N
<b>Required electrical supply (amps):</b>	16
<b>Power cable:</b>	
~ Cable type:	H07RN-F
~ Cable dimension:	3 x 2.5 mm <sup>2</sup>
<b>Electrical current split 1AM (amps):</b>	L1: 16

### Key Information:

<b>Cooking surface:</b>	Ø 290 mm
<b>Working temperature MIN:</b>	-
<b>Working temperature MAX:</b>	-
<b>Direct heat emission:</b>	0.25 kW
<b>Latent heat emission:</b>	0.10 kW
<b>Steam emission:</b>	0.14 kg / h
<b>Net weight:</b>	-
<b>Shipping height:</b>	395 mm
<b>Shipping width:</b>	450 mm
<b>Shipping depth:</b>	700 mm
<b>Shipping volume:</b>	0.124 m <sup>3</sup>

\*Missing information may be updated from time to time, please contact our representative to receive the updated data sheets.

**Modular Electric Wok Induction  
NEWI 4-60 AM, Electric Cooker  
with One Ceramic Glass**

The company reserves the right to make modifications to the products without prior notice.  
All information correct at time of printing.

2016.04.25

